



Combination Devices

RESIDENTIAL | COMMERCIAL | INDUSTRIAL

Table of contents

Combination families	C-2
Combination devices intro	C-3
USB charging devices with duplex receptacles	C-4
Decorator combination devices	C-6
Combination devices	C-7
LED combination nightlights	C-9

Combination devices

Providing either 2 or 3 devices in a single-gang box with decorator or traditional styling, our broad line of combination devices encompasses switches, receptacles, pilot lights and nightlights. Bathrooms, kitchens, basements and hallways are all locations that often require or can benefit from the space savings and convenience of combination devices.

Combination families

USB duplex receptacles



C-4

Decorator combination devices



C-6

Standard grade combination devices



C-7

LED combination nightlights



C-8

The Eaton difference

- Convenient patented built-in wire stripper speeds installation
- Steel mounting strap is zinc plated for added corrosion resistance
- USB Receptacles allow for quick and convenient charging of most electronic accessories
- Nightlight models feature dimmable LED lamps



Specific combination device solutions for today's needs



USB charging devices

Eaton's USB charging receptacles offer fast, convenient and efficient charging of portable electronic devices directly from a standard outlet without bulky adapters or powered computers.

See page C-4



Shown:
TRUSBAC15




Light & motor control

Combination switches are horsepower rated to carry motor loads such as bathroom fans and garbage disposals on the same or separate circuits.

See page C-6



Shown:
7728

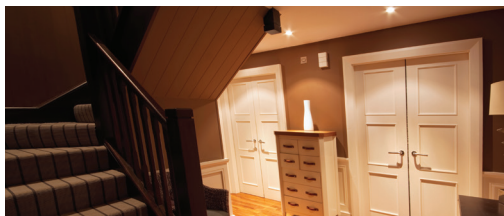

LED nightlight combinations

Ideal for bathrooms, hallways, stairs and landings, flush-mount LED nightlight combination devices provide added safety and comfort along with switch or receptacle functionality.

See page C-9



Shown:
TR7735

USB high power charging devices

Combination USB charging devices with TR duplex receptacle

Product description

2-pole, 3-wire grounding
 15A, 125V/AC, 5V/DC, 5.0A
 20A, 125V/AC, 5V/DC, 5.0A
 NEMA 5-15R, 5-20R

Design features

- Standard duplex receptacle with one USB-A and C, or two USB-A or two USB-C or one ports rated at a combined 5.0A
- Dual USB-C charging ports charge most electronic devices that comply with the latest USB-C standard
- Tamper resistant shutters provide compliance with 2017 and 2020 NEC which requires that all 15A and 20A, 125V and 250V, non-locking type receptacles installed in dwelling units must be tamper resistant
- Automatic grounding system eliminates need for bonding jumper in grounded metal enclosure, provides redundant measure of ground continuity where jumper is used
- Thermoplastic top and back-body are virtually unbreakable to deliver years of durable performance
- Steel mounting strap is zinc plated for added corrosion resistance
- Convenient exclusive built-in wire strippers speed installation
- Replaces a standard duplex receptacle
- Black tamper resistant shutters nearly disappear from view, creating a seamless, contemporary look



TRUSBAC15



TRUSBAC20



TRUSB15



TRUSBC20



TRUSB5A15



TRUSB5A20

USB chargers with TR duplex receptacle



Rating		USB Rating		Description	Color suffix	Catalog no.
A	V/AC	A	V/DC			
15	125	5.0	5	USB A/C charger with TR duplex receptacle	B, BK, GY, LA, V, W	<input type="checkbox"/> TRUSBAC15__
20	125	5.0	5	USB A/C charger with TR duplex receptacle	B, BK, GY, LA, V, W	<input type="checkbox"/> TRUSBAC20__
15	125	5.0	5	USB C charger with TR duplex receptacle	B, BK, GY, LA, V, W	<input type="checkbox"/> TRUSBC15__
20	125	5.0	5	USB C charger with TR duplex receptacle	B, BK, GY, LA, V, W	<input type="checkbox"/> TRUSBC20__
15	125	5.0	5	USB 5.0A charger with TR duplex receptacle	B, BK, GY, LA, V, W	<input type="checkbox"/> TRUSB5A15__
20	125	5.0	5	USB 5.0A charger with TR duplex receptacle	B, BK, GY, LA, V, W	<input type="checkbox"/> TRUSB5A20__

cULus Listed UL 498 and UL1310; NOM certified

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)



Specification information: Please visit www.eaton.com/wiringdevices

Compliances, specifications and availability are subject to change without notice.

Tamper resistant

Combination USB charging devices with TR single/duplex receptacle and charging station



TR7741

Product description

2-pole, 3-wire grounding
 15A, 125V/AC, 5V DC 2.4A
 15A, 125V/AC, 5V DC 0.7A
 15A, 125V/AC, 5V/DC 3.6A; 20A, 125V/AC, 5V/DC 3.6A
 NEMA 5-15R, 5-20R

5V/DC, 5.0A Total (USB charging station)
 15A, 125V/AC, 5V/DC 3.1A (Hospital Grade Only)
 20A, 125V/AC, 5V/DC 3.1A (Hospital Grade Only)



TR7765

Design features

- Standard AC receptacle with two USB charging ports for conveniently charging most electronic components
- USB-A charging ports rated at 5.0 Amps total - 2.5A top two ports, 2.5A bottom two ports (7750 only)
- Dual USB-A charging ports charge most compatible electronic devices with 3.1A or 3.6A total amps
- Tamper resistant shutters provide compliance with 2017 and 2020 NEC which requires that all 15A and 20A, 125V and 250V, non-locking type receptacles installed in dwelling units must be tamper resistant
- Automatic grounding system eliminates need for bonding jumper in grounded metal enclosure and provides redundant measure of ground continuity where jumper is used
- Thermoplastic top and back-body are virtually unbreakable to deliver years of durable performance
- Two wipe blade contacts and double wipe ground contacts to ensure long-term plug retention
- Convenient exclusive built-in wire strippers speed installation
- All mounting straps are galvanized (zinc plated)
- Replaces a standard duplex receptacle and uses a decorator style wallplate
- Black tamper resistant shutters nearly disappear from view, creating a seamless, contemporary look



TR7766

Combination USB charger with TR receptacle



Rating A	V/AC	USB Rating A	V/DC	Description	Color suffix	Catalog no.
15	125	0.7	5	Combination USB charger with tamper resistant single receptacle	BK, GY, LA, V, W	□ TR7740__
15	125	2.4	5	Combination USB charger with TR single receptacle	B, BK, GY, LA, V, W	□ TR7741__
15	125	3.6	5	3.6A USB charger with TR duplex receptacle	B, BK, GY, LA, RB, SG, V, W	□ TR7765__
20	125	3.6	5	3.6A USB charger with TR duplex receptacle	B, BK, GY, LA, RB, SG, V, W	□ TR7766__
15	125	3.1	5	USB charger with hospital grade TR duplex receptacle	GY, LA, RD, V, W	□ TR8255__
20	125	3.1	5	USB charger with hospital grade TR duplex receptacle	GY, LA, RD, V, W	□ TR8355__

cULus Listed UL 498 and UL1310; NOM certified



TR8355

USB charging station



USB Rating A	V/DC	Description	Color suffix	Catalog no.
5.0	5	USB multiport charging station	BK, GY, LA, V, W	□ 7750__

UL Listed to UL1310



7750

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), BK (Black), GY (Gray), LA (Light Almond), RB (Oil Rubbed Bronze), RD (Red), SG (Silver Granite), V (Ivory), W (White)



Specification information: Please visit www.eaton.com/wiringdevices

Compliances, specifications and availability are subject to change without notice.

Tamper resistant

Decorator commercial spec grade combination devices

Product description

Single pole, 3-way
15A, 120/277V/AC switches
15A, 125V/AC receptacles



5-15R



7729



TR7730

Design features

- 120/277V/AC rating ideal for fluorescent lighting fixtures and a broad variety of applications
- Switches are horsepower rated for motor loads per UL20
- Thermoplastic rocker, top and backbody are virtually unbreakable to deliver years of durable performance
- Tamper resistant shutters provide compliance with 2017 and 2020 NEC which requires that all 15A and 20A, 125V and 250V, non-locking type receptacles installed in dwelling units must be tamper resistant
- Steel mounting strap is zinc plated for added corrosion resistance
- Convenient exclusive built-in wire stripper speeds installation
- Backwire clamps on side terminals provide for easy installation of #12 and #14 AWG wire
- Triple wipe blade contacts and double wipe ground contacts to insure long-term plug retention (TR7730)
- Tri-combo screw heads offer greater installation flexibility
- Black tamper resistant shutters nearly disappear from view, creating a seamless, contemporary look



Decorator combination switches



Rating A	V/AC	Description	Color suffix	Catalog no.
15A	120/277	Two single pole switches, back & side wire	BK, LA, V, W	□ 7728__
		Three single pole switches, back & side wire	BK, LA, V, W	□ 7729__
		Two 3-way switches, back & side wire	BK, LA, V, W	□ 7731__
		One single pole switch w/ one 3-way switch, back & side wire	BK, LA, V, W	□ 7732__

cULus Listed to UL20, file no. E18704; NOM certified

Decorator combination switch with receptacle



Rating A	V/AC	Description	Color suffix	Catalog no.
15	120 switch	One single pole switch with	BK, LA, V, W	□ TR7730__
15	125 receptacle	one tamper resistant NEMA 5-15R receptacle, back & side wire		


cULus Listed to UL20, file no. E18704; NOM certified

Horsepower rated for motor loads per UL20

A	Rating		Max. Amps
	120V/AC	240V/AC	
15	1/2 HP	2 HP	12

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: BK (Black), LA (Light Almond), V (Ivory), W (White)



Specification information: Please visit www.eaton.com/wiringdevices

Compliances, specifications and availability are subject to change without notice.

Tamper resistant

Standard commercial spec grade combination devices

Product description

Single pole, 3-way, pilot light
15A, 120/277V/AC switches; 15A, 120V/AC switches

Design features

- Combination switches with pilot light (277 & 294) can be wired to indicate power ON or power OFF
- 120/277V/AC rating ideal for fluorescent lighting fixtures and a broad variety of applications
- Switches are horsepower rated for motor loads per UL20
- Thermoplastic toggle, top and backbody are virtually unbreakable to deliver years of durable performance
- Ultrasonic welding and integrated construction of the strap and body provide superior ground integrity even under heavy use
- Automatic grounding system eliminates the need for bonding jumper in grounded metal enclosure and provides redundant measure of ground continuity where a jumper is used
- Steel mounting strap is zinc plated for added corrosion resistance
- Convenient exclusive built-in wire stripper speeds installation
- Backwire clamps on side terminals provide for easy installation of #12 and #14 AWG wire
- Terminal screws are backed out and ready for wiring to enhance ease of installation
- Tri-combo screw heads offer greater installation flexibility



271



277

Toggle combination switches

A	Rating			Description	Color suffix	Catalog no.
	V/AC	W	V			
15	120/277			Two single pole switches, back & side wire	B, LA, V, W	□271__
				Two 3-way switches, back & side wire	LA, V, W	□276__
15	120	1/25	125	One single pole switch with pilot light, back & side wire	B, LA, V, W	□277__

cULus Listed to UL20; CSA certified to C22.2, no. 111, file no. E18704; NOM certified

Toggle combination switches

A	Rating			Description	Color suffix	Catalog no.
	V/AC	W	V			
15	120/277			One single pole switch with one 3- way switch, back & side wire	B, LA, V, W	□275__
15	120	1/25	125	One 3-way switch with pilot light, back & side wire	B, V	□294__

cULus Listed to UL20/UL498, file no. E18704; CSA certified to C22.2, no. 111, except 294

Horsepower rated for motor loads per UL20

A	Rating		Max. Amps
	120V/AC	240V/AC	
15	1/2 HP	2 HP	12

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), LA (Light Almond), V (Ivory), W (White)




Specification information: Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.

Standard commercial spec grade combination devices

Product description

Single pole, 3-way
15A, 120V/AC switches
15A, 125V/AC, 20A, 125V/AC receptacles



TR274



TR291

Design features

- Combination switch with receptacle features UL Listed tamper resistant shutters that prevent the insertion of foreign objects
- Neon pilot light is ON when switch is ON (TR274 & TR291)
- Switches are horsepower rated for motor loads per UL20
- Thermoplastic toggle, top and backbody are virtually unbreakable to deliver years of durable performance
- Automatic grounding system eliminates the need for bonding jumper in grounded metal enclosure and provides redundant measure of ground continuity where a jumper is used
- Steel mounting strap is zinc plated for added corrosion resistance
- Backwire clamps on side terminals provide for easy installation of #12 and #14 AWG wire
- Triple wipe blade contacts and double wipe ground contacts ensure long-term plug retention on receptacles
- Tri-combo screw heads offer greater installation flexibility
- Black tamper resistant shutters nearly disappear from view, creating a seamless, contemporary look.



Toggle combination switch with receptacle



Rating		Description	Color suffix	Catalog no.
A	V/AC			
15	120	One single pole switch with one tamper resistant NEMA 5-15R	B, BK, LA, V, W	<input type="checkbox"/> TR274__
15	125	2-pole, 3-wire receptacle, back & side wire		
15	120	One 3-way switch with one tamper resistant NEMA 5-15R	B, BK, LA, V, W	<input type="checkbox"/> TR293__
15	125	2-pole, 3-wire receptacle, back & side wire		

cULus Listed to UL20/UL498, file no. E18704; NOM certified

Toggle combination switch with receptacle



Rating		Description	Color suffix	Catalog no.
A	V/AC			
20	125	One single pole switch with one tamper resistant NEMA 5-20R	B, BK, LA, V, W	<input type="checkbox"/> TR291__
20	125	2-pole, 3-wire receptacle, back & side wire		

cULus Listed to UL20/UL498, file no. E18704; NOM certified

Horsepower rated for motor loads per UL20

A	Rating		Max. Amps
	120V/AC	240V/AC	
15	1/2 HP	2 HP	12
20	1 HP	2 HP	16

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown) BK (Black), LA (Light Almond), V (Ivory), W (White)



Specification information: Please visit www.eaton.com/wiringdevices


Compliances, specifications and availability are subject to change without notice.

Tamper Resistant

Dimmable LED nightlight combination devices

Product description

Single pole 15A, 120V/AC
 15A, 120V/AC switches
 15A, 125V/AC; 20A, 125V/AC receptacles
 120V nightlight



7738



TR7735



7737



TRSGFNL15

Design features

- Light sensor turns the nightlight ON when ambient light is low, and OFF when ambient light is high; can also be set to manual ON/OFF (automatic only for GFCI)
- Nightlights are dimmable to desired light level (excluding GFCI)
- Long-lasting energy efficient LED bulbs are rated for 50,000 hours lamp life
- Nightlight features full dimming as well as 3 preset levels to easily match light levels on devices mounted in series
- Nightlights use 3 LED lamps that consume a maximum of 1 watt of energy
- Combination nightlight/receptacle (TR7735 & TR7736) features UL Listed tamper resistant shutters that prevent the insertion of foreign objects
- Automatic grounding system eliminates the need for bonding jumper in grounded metal enclosure and provides redundant measure of ground continuity where a jumper is used
- Terminal screws are backed out and ready for wiring to enhance ease of installation
- Devices mounted in series can be controlled by an external switch in guide light mode
- Black tamper resistant shutters nearly disappear from view, creating a seamless, contemporary look



LED nightlight combination with switch



Rating A	V/AC	W	Description	Color suffix	Catalog no.
15	120	1	One single pole switch with nightlight, back & side wire	BK, LA, V, W	□7738__

cULus Listed to UL20, file no. E18704; NOM certified

LED nightlight combination with receptacle



Rating A	V/AC	W	Description	Color suffix	Catalog no.
15	125	1	Nightlight with one tamper resistant receptacle NEMA 5-15R, 2-pole, 3-wire, back & side wire	BK, LA, V, W	□TR7735__
20	125	1	Nightlight with one tamper resistant receptacle NEMA 5-20R, 2-pole, 3-wire, back & side wire	BK, LA, V, W	□TR7736__

cULus Listed to UL498, file no. E15058; NOM certified

Full LED nightlight



Rating A	V/AC	W	Description	Color suffix	Catalog no.
120		1	Full hallway nightlight, back & side wire	BK, LA, V, W	□7737__

cULus Listed to UL1598, file no. E334295; NOM certified


LED nightlight combination with duplex self-test GFCI



Rating A	V/AC	Description	Color suffix	Catalog no.
15	125	Tamper resistant duplex GFCI with nightlight, back & side wire	BK, LA, V, W	□TRSGFNL15__
20	125	Tamper resistant duplex GFCI with nightlight, back & side wire	BK, LA, V, W	□TRSGFNL20__

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: BK (Black), LA (Light Almond), V (Ivory), W (White)



Specification information: Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.

